



QSPAC

World Leading Manufacturer of Self Wound Lamination


Quality • Service • People • Accountability • Communication

QSPAC Company Profile

QSPAC Industries, Inc., headquartered in Santa Fe Springs, California, is a worldwide supplier of self wound lamination for the labels and tags industries. Our BOPP and PET films are coated with a high performance and clear emulsion acrylic adhesive to give your labels and tags the best finish and protection.

With over 200,000 square feet of warehousing at our strategically converting and shipping facilities, we have the ability to provide high quality products and on-time deliveries to the market.

QSPAC's customer service and field sales team have an extensive amount of experience and knowledge to share with our customers. We are here to help you with any applications you may encounter and are committed to remain the best supplier in the industry.

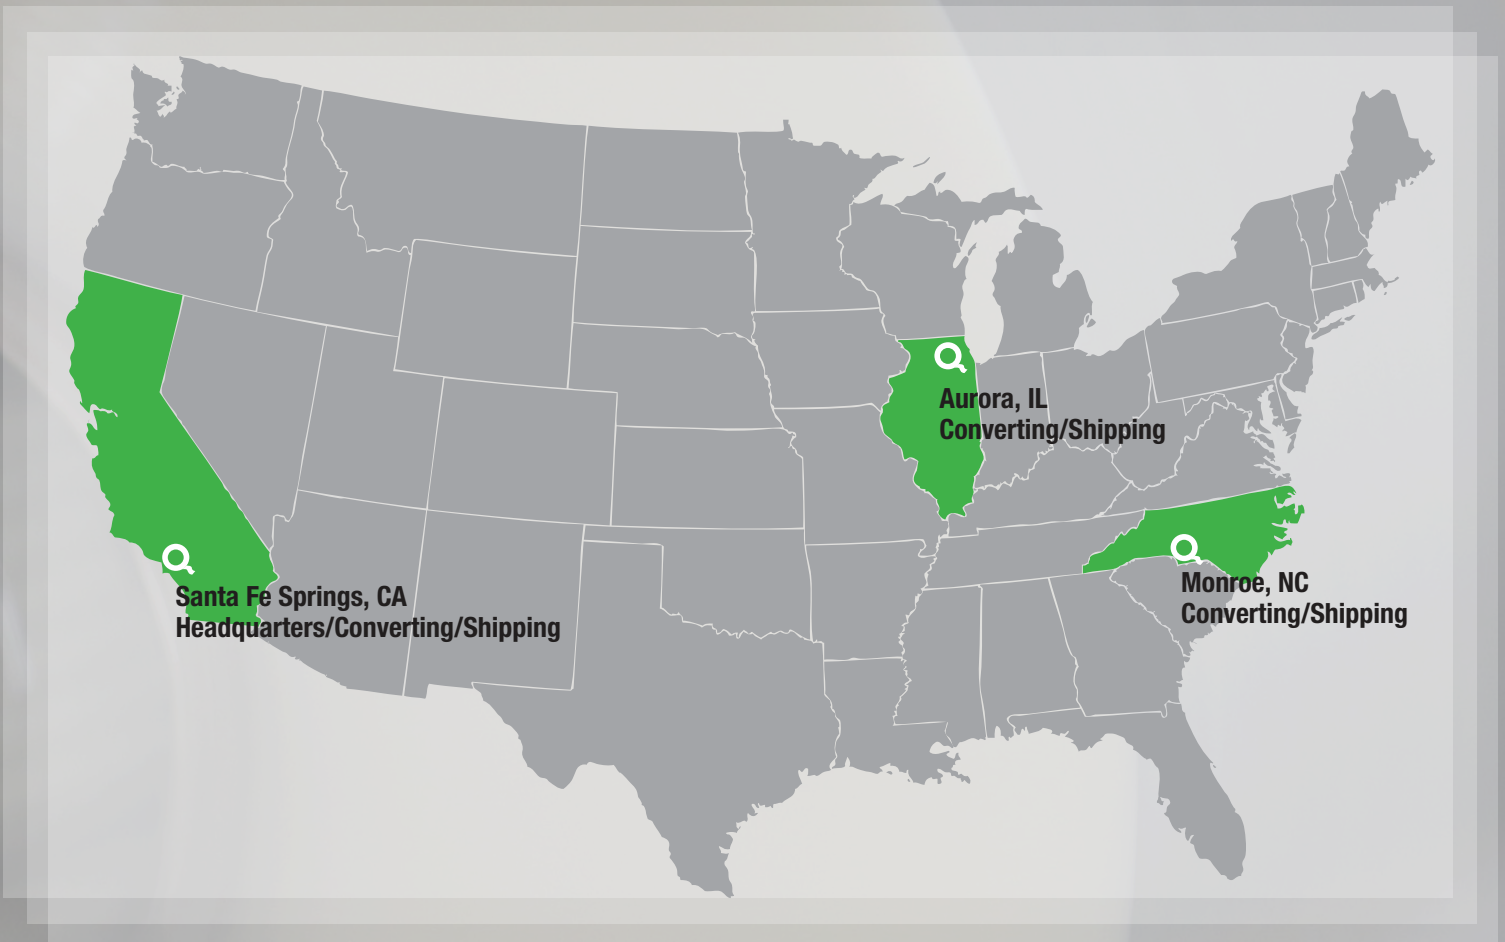

Polypropylene & Polyester Lamination

| Product # | Description | Total Thickness (mil) | Film Thickness (mil) | Adhesive Thickness (mil) |
|---------------------------------|--------------------------------------------------|-----------------------|----------------------|--------------------------|
| Polypropylene Lamination | | | | |
| 806C | clear super thin lamination | 0.8 | 0.6 | 0.2 |
| 808C | clear thinner gauge lamination | 0.95 | 0.7 | 0.25 |
| 810C | gloss clear economy | 1.05 | 0.8 | 0.25 |
| 811C | gloss clear lamination | 1.1 | 0.8 | 0.3 |
| 812C | clear economy grade with medium coat adhesive | 1.15 | 0.75 | 0.4 |
| 812HG | holographic lamination | 1.2 | 0.9 | 0.3 |
| 800XC | extra clear gloss lamination | 1.3 | 1.0 | 0.3 |
| 815C | gloss clear medium coat adhesive general purpose | 1.5 | 1.0 | 0.5 |
| 818C | gloss clear heavy coat adhesive general purpose | 1.8 | 1.0 | 0.8 |
| 822C | gloss clear extra heavy film and adhesive | 2.2 | 1.2 | 1.0 |
| 830C | gloss clear super duty heavy film and adhesive | 3.0 | 2.0 | 1.0 |
| 808M | matte finish thinner gauge lamination | 0.95 | 0.7 | 0.25 |
| 814M | matte finish with excellent wet out | 1.4 | 1.0 | 0.4 |
| 814E | clear easy release lamination | 1.4 | 1.0 | 0.4 |
| 815ST | soft touch lamination | 1.5 | 1.0 | 0.4 |
| 819H | hot melt clear lamination | 1.9 | 1.2 | 0.7 |
| LXDG090 | CPP textured lamination | 3.6 | 3.2 | 0.4 |
| Polyester Lamination | | | | |
| 916C | clear general purpose lamination | 1.6 | 1.0 | 0.6 |
| 916UL | UL recognized | 1.6 | 1.0 | 0.6 |
| 912E | easy release clear lamination | 1.2 | 0.8 | 0.4 |
| 916E | easy release clear lamination | 1.6 | 1.0 | 0.6 |
| 910TT | thin film gloss thermal transfer printable | 1.0 | 0.75 | 0.25 |
| 913TT | standard gloss thermal transfer printable | 1.3 | 0.92 | 0.38 |
| LME918 | matte polyester lamination | 1.8 | 1 | 0.8 |


Application Temperatures: Polypropylene & Polyester= 32°-150° F • Operating Temperatures: Polypropylene = 0°-200° F / Polyester = 0°-300° F
 Conforms to FDA 21 CFR 175.105, 21 CFR 177.1520, and 21 CFR 177.1630

Important Notice: The above listed information is based on calculations and tests we believe to be reliable. However, the accuracy and completeness are not guaranteed. Before using, user shall determine the suitability of the product for its own use and assumes all risk and liability related to the product. The seller limits its obligations to replacement or at its option, reimbursement of the purchase price of products shown to the seller's satisfaction to have been defective at the time the seller sold it.

*For special application requests, please contact QSPAC for details.

Manufacturing & Converting

At QSPAC, we only use the best coating and converting equipment to manufacture our over-laminates. Our state-of-the-art coaters and slitters can produce billions of square inches per month and we have plans to add more equipment to meet market demands.

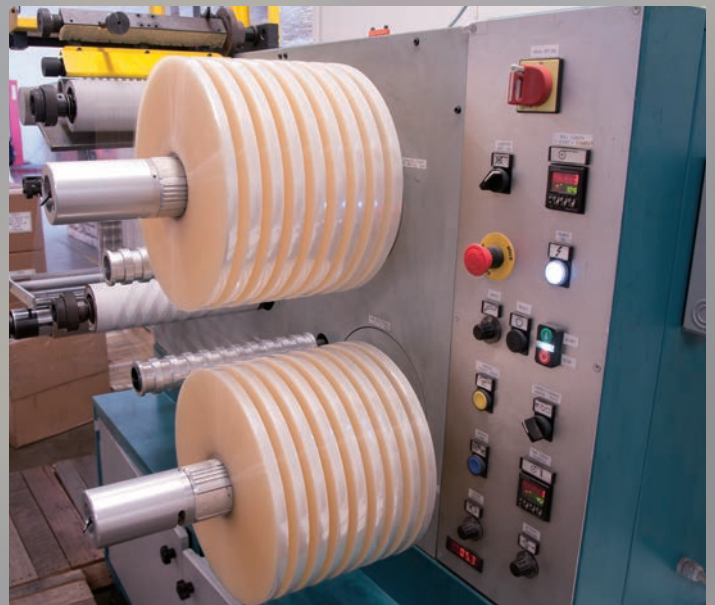

Featured Products & Applications

808C & 808M



Flexo printed labels and stand up pouches.

812C & 814M



Digital printed labels.

815ST & 913TT



Soft touch and thermal transfer printable labels.

818C & 822C



Extended content labels.

916C & 916UL



Outdoor and UL recognized labels.



www.Qspac.com
Tel: (877) 407-7722
Fax: (562) 407-3871
Question@Qspac.com